

Glow67

Specification Sheet




Specifications

Input Voltage:	24VDC
CRI:	90+
Power:	5.8W/ft
Lumens:	753lm/ft
Cut Length:	1.04" (26.3mm)
Environment:	IP67
Dimensions (W x H):	0.47" x 0.18"
Beam Angle:	150°
Maximum Run:	25ft (145 Watts)
Lamp Life:	50,000 Hours
Operating Temp:	-4°F to 113°F (-20°C to 45°C)
Adhesive:	3M
Warranty:	5 years
Dimming Control:	Incandescent • CFL/LED • MLV ELV • 0-10V • Dimmer switch / wireless app & wall switch

Performance Table

SKU	Length	CCT	Lumens
Glow67-27-16	16.4ft	2700K	703lm/ft
Glow67-30-16	16.4ft	3000K	723lm/ft
Glow67-35-16	16.4ft	3500K	744lm/ft
Glow67-40-16	16.4ft	4000K	753lm/ft
Glow67-50-16	16.4ft	5000K	750m/ft
Glow67-27-164	100ft	2700K	703lm/ft
Glow67-30-164	100ft	3000K	723lm/ft
Glow67-35-164	100ft	3500K	744lm/ft
Glow67-40-164	100ft	4000K	753lm/ft
Glow67-50-164	100ft	5000K	750m/ft

Mechanical Diagrams

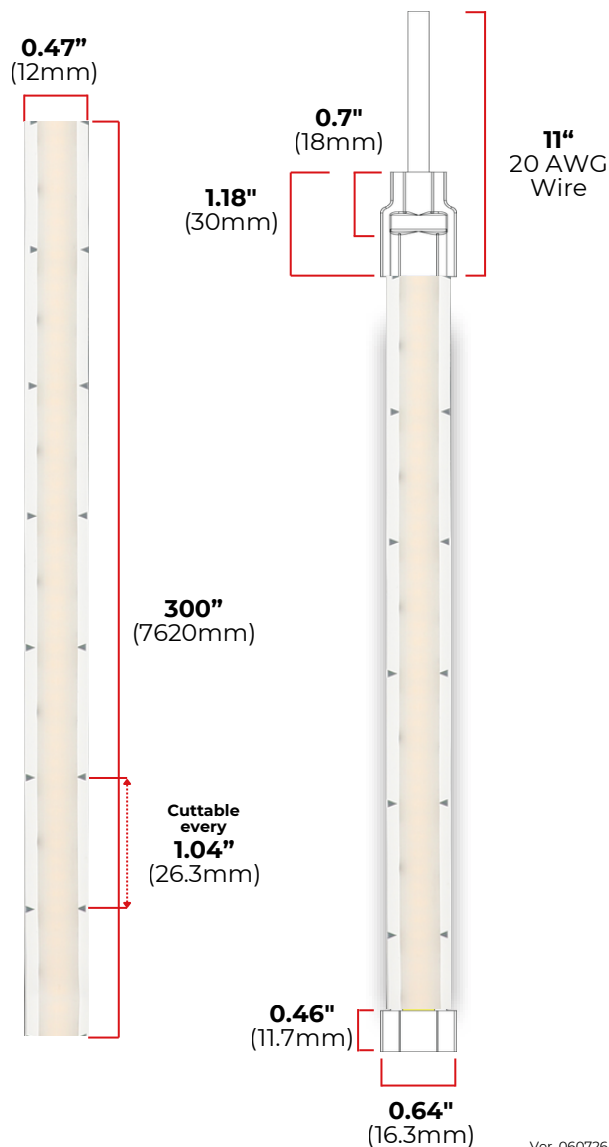

Connectors and Wires

Glow67-TT	0.47" (12mm) Tape to tape connector
Glow67-TW	0.47" (12mm) Tape to wire connector with a 11.8" lead wire
Glow67-EC	0.47" (12mm) End cap
Glow67-WC	0.47" (12mm) Wall Clip and Two Screws
Glow67-SS	Wet Location Silicone Sealant
WS-2P-15	2 Pin 15ft Wire Spool
WS-2P-250	2 Pin 250ft Wire Spool