
LED SPOTLIGHT-CANLESS
FIRE RATED RECESSED MINI PANEL - CCT SELECT
3", 4", 6"

Intertek

LUXSAFE BY LUXRITE®

2 HOUR FIRE RATING
TESTED TO COMPLY WITH UL 263
ASTM E119 & CAN ULC S101



2 HOUR FIRE RATED REINFORCED
& HEAT RESISTANT STEEL CASING



3" | 8W | 500 LUMENS



4" | 12W | 800 LUMENS



6" | 15W | 1100 LUMENS

CRI 90

COLOR SELECTABLE
2700K | 3000K | 3500K | 4000K | 5000K

2 HOUR FIRE RATED | AIR TIGHT | IC RATED | DIMMABLE TRIAC | 120V | WET LOCATION RATED | 5 YEAR WARRANTY

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR	FIRE RATING
3"	LR23478	LED/MINI3/FIRE/5CCT/RD/WT	8	120V	69	50,000	$ 0.96	2 HOUR
4"	LR23480	LED/MINI4/FIRE/5CCT/RD/WT	12	120V	67	50,000	$ 1.44	2 HOUR
6"	LR23485	LED/MINI6/FIRE/5CCT/RD/WT	15	120V	75	50,000	$ 1.80	2 HOUR

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	ETL LISTED	UL263 COMPLIANT	ASTM E119	CAN ULC S101	PLATE (KNOCKOUT)
LR23478	LED/MINI3/FIRE/5CCT/RD/WT	2700K 3000K 3500K 4000K 5000K	CCT SELECT	500	90	YES	YES	YES	YES	LR41010 (R0)
LR23480	LED/MINI4/FIRE/5CCT/RD/WT	2700K 3000K 3500K 4000K 5000K	CCT SELECT	800	90	YES	YES	YES	YES	LR41002 (#1) LR41006 (#3) LR41010 (R1)
LR23485	LED/MINI6/FIRE/5CCT/RD/WT	2700K 3000K 3500K 4000K 5000K	CCT SELECT	1100	90	YES	YES	YES	YES	LR41002 (#2) LR41006 (#5) LR41010 (R3)

COMPATIBILITY

COMPATIBLE WITH:

LR35126
Emergency
LED Driver




LR41002
New Construction
Mounting Plate




KNOCKOUT SIZE	
#0	Ø3.14" (Ø80 mm)
#1	Ø4.33" (Ø110 mm)
#2	Ø6.29" (Ø160 mm)

LR41010
New Construction
Mounting Plate





KNOCKOUT SIZE	
#L0	Ø2.12" (Ø54 mm)
#L1	Ø2.83" (Ø72 mm)
#L2	Ø3.75" (Ø95mm)



KNOCKOUT SIZE	
#R0	Ø3.25" (Ø82 mm)
#R1	Ø4.33" (Ø110 mm)
#R2	Ø5.25" (Ø132mm)
#R3	Ø6.25" (Ø160 mm)

LR41006
New Construction
Mounting Plate





KNOCKOUT SIZE	
#0	Ø2.12" (Ø54 mm)
#1	Ø3.15" (Ø80 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø4.25" (Ø108 mm)
#4	Ø5.25" (Ø132 mm)
#5	Ø6.25" (Ø159 mm)

TRIM REPLACEMENT


*SOLD SEPARATELY

3"




LR23479
LED/MINI3/FIRE/TRIM/RD/BK

4"



LR23481
LED/MINI4/FIRE/TRIM/RD/BK

6"




LR23486
LED/MINI6/FIRE/TRIM/RD/BK

DIMENSIONS


3″

CUTOUT: Ø 3.25″

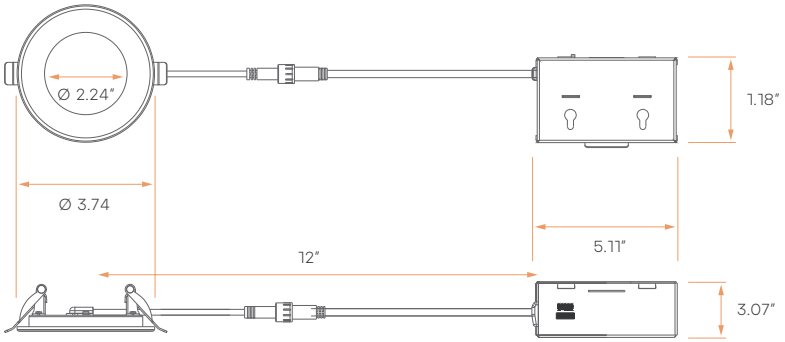

4″

CUTOUT: Ø 4.25″

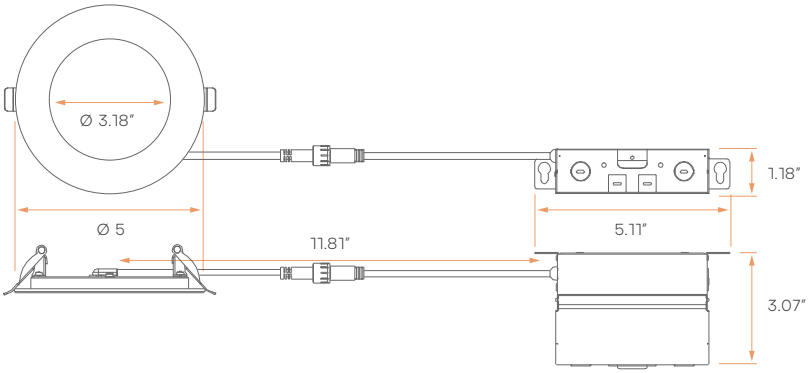

6″

CUTOUT: Ø 6.22″

