

SMD Series 200

Specification Sheet




Performance Table

SKU	Length	CCT	Lumens
LC-SMD-200-27-16	16.4ft	2700K	Up to 200lm/ft
LC-SMD-200-30-16	16.4ft	3000K	Up to 200lm/ft
LC-SMD-200-35-16	16.4ft	3500K	Up to 200lm/ft
LC-SMD-200-40-16	16.4ft	4000K	Up to 200lm/ft
LC-SMD-200-50-16	16.4ft	5000K	Up to 200lm/ft

Specifications

Input Voltage:	24VDC
CRI:	90+
Power:	2W/ft
Lumens:	200lm/ft
Cut Length:	1.97" (50 mm)
Environment:	IP20
Dimensions (W x H):	0.31" x 0.06"
Beam Angle:	150°
Maximum Run:	32.8ft (64 Watts)
Lamp Life:	50,000 Hours
Warranty:	3 years
Color Temperature:	2700K-5000K

Mechanical Diagrams

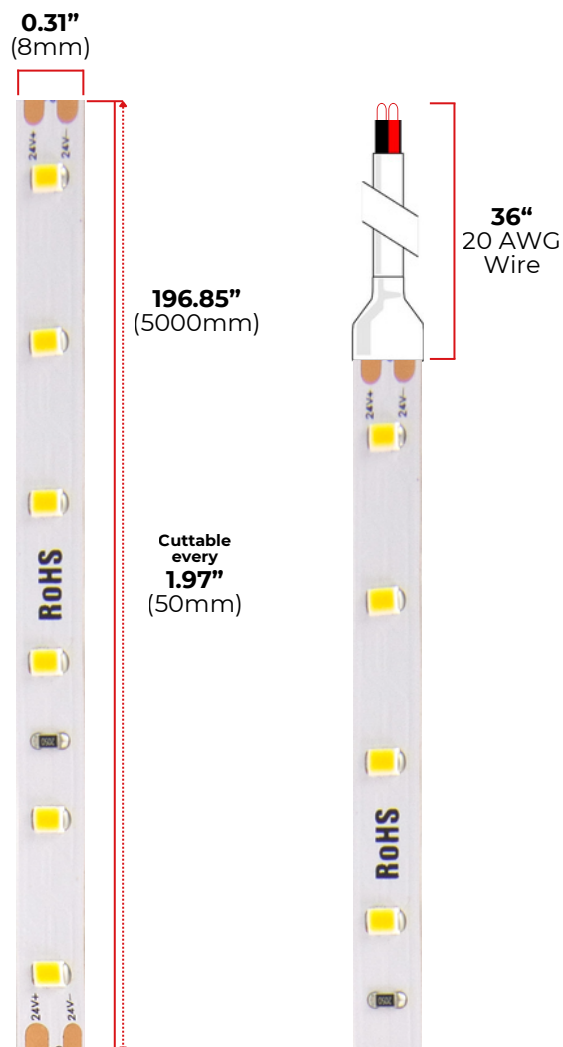

Connectors and Wires

ENO-SC-TT-8	0.31" (8mm) Tape to Tape screw connectors
ENO-SC-TW-8	0.31" (8mm) Tape to Wire screw connectors
ENO-SC-LL-8	0.31" (8mm) L Shape 90° screw connectors
ENO-SC-TW-72W-8	0.31" (8mm) Tape to wire screw connectors with a 72" lead wire
WS-2P-15	2 Pin 15ft Wire Spool
WS-2P-250	2 Pin 250ft Wire Spool